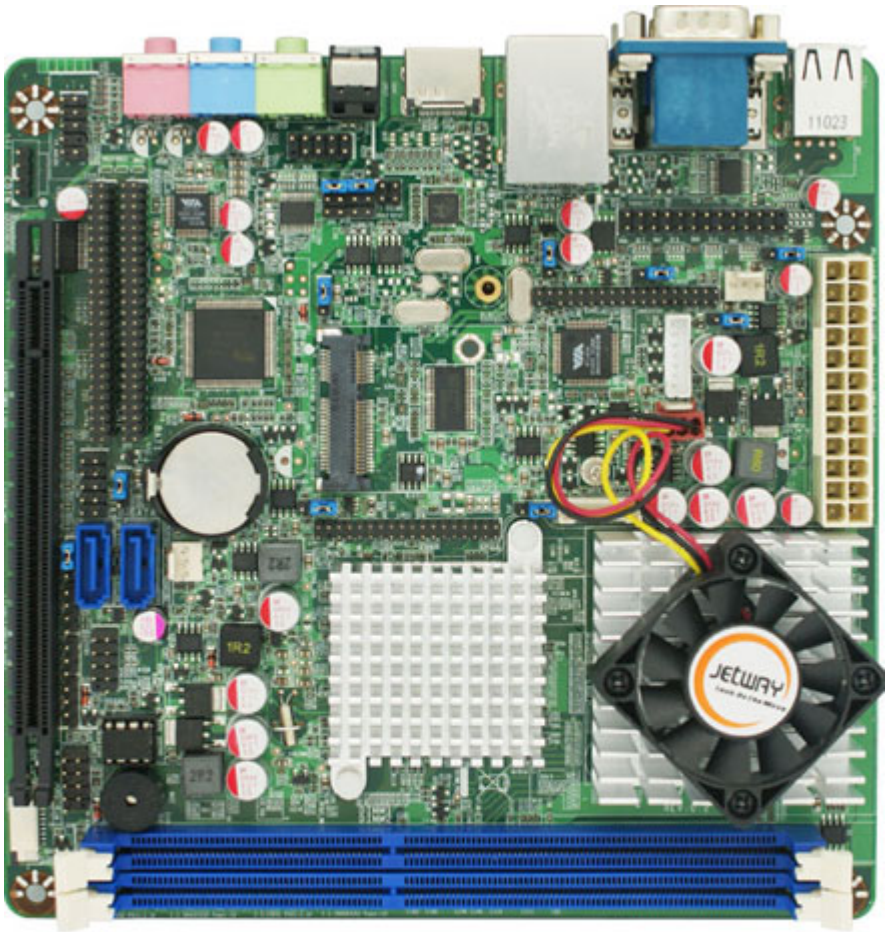

134.00 EUR
incl. 19% VAT, plus shipping

- VIA VX900H Chipset
- Support VIA Nano L2007 (65nm,FSB 800MHz,1.6GHz) processor
- Integrated Chrome9 HD DX9 Engine
- Integrated LVDS support 24-bit TFT LCD
- Support 1 x PCIe x 16 slot (x 8 card)
- Support Serial ATA 2 Devices
- 1 * Gigabit LAN
- Support DC Fan
- VIA VT1705 HD Audio Codec with 6-Channel
- 170 x 170mm Mini-ITX Form Factor
- Support Watch dog Technology

CPU	• Support VIA Nano L2007 (65nm, 1.6GHz)processor • Front Side Bus 800MHz
Chipset	• VIA VX900H Chipsets • VIA Chrome9 HD DX9 3D engines (Share System Memory: 64/128/256/512MB)
Memory	• 2 * 240-pin DIMM Sockets for un-buffered DDR3 1066MHz SDRAM up to 8GB
Expansion Slots	• 1 * PCIe x 16 slot (x 8 card)
Power Management	• ACPI S3/S4 Compliant ,supports VIA PowerSaver™ feature

Storage	2 * Serial ATA2 3Gb/s connectors with RAID 0,1 function 1 * Mini PCI-E
Audio	VIA VT1705 HD Audio Code with 6-Channel
Ethernet LAN	1 * RTL8111E 10 / 100 / 1000 PCI-E LAN
USB	Embedded 7 * USB 2.0/1.1
LVDS	Each of onboard 24-bit Dual & Single channel LVDS connector
Rear Panel I / O	4 * USB 2.0/1.1 ports 1 * RJ-45 port & 1 * SPDIF out 3 * Audio I/O ports (Line-in, Mic and Line-out) 1 * VGA port 1 * DB-9 RS232 COM port 1 * HDMI Connector
Internal I / O	1 * CPU Smart Fan Connector, 2 * Sys/Chassis Fan Connectors 2 * USB 2.0/1.1 headers for 3 USB ports 1 * 9-Pin COM Port header (RS232/422/485) 1 * 24 bit Dual Channel & 1 * 24 bit Single Channel LVDS header 1 * Parallel header 1 * GPIO header 1 * 24-pin ATX power connector
BIOS	AMI 8MB DIP-SPI Flash ROM
Form Factor	Mini-ITX Embedded Motherboard(170mmx170mm)
Packing	Color Box Dimension■200(W) x 200(D) x 70(H)mm 20 PCS in Cases Gross Weight ■15.4KGS 20 PCS Net Weight■10.3KGS 20 PCS / Cases, Case size : 720(L) x 410(W) x 200(H)mm
Certificate	CE,FCC,RoHS
Functional	ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
Temperature	Operating within 0~60 centigrade Storage within -20-85 centigrade

Product Accessories
- COM cable
- Manual
- CD
- 1x SATA cable
- I/O shield